


Emsafe 5,0 l. ø224

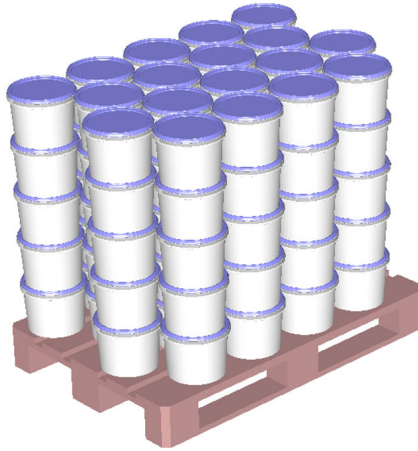

Certified to
ISO 9001, 14001 and 22000

Product information

Pail

Name	Diameter mm.	Height mm.	Weight g.	Volume (brimful) l.	Handle (iron) g.	Handle (plastic) g.	Decoration	Unit/layer (pallet)
Emsafe 5,0 l. ø224	224	177	147	5,3	24	5	Offset	18

Lid

Variant	Diameter mm.	Weight g.	Height (mounted) mm.	Stack height (mounted) mm.	Volume under lid l.
Emsafe ø224 ES	222	37	178	169	5,0
Emsafe ø224 ESM	222	38	188	182	5,3
Emsafe ø224 ESH	222	43	178	163	4,8

Delivery packaging

Delivery packaging	Quantity	Del. height mm.
Integrated pallet (pail+lid)	576	1280
Pail on pallet (1200x800)	756	1310
Lid (ES) in container on pallet (1200x800)	2196	730
Lid (ESM) in container on pallet (1200x800)	2196	730
Lid (ESH) in container on pallet (1200x800)	2196	730

Information

Emsafe meets the highest demands on impenetrability, product safety and functionality. The pail and lid is thoroughly engineered and provided with detailed surface finish. A patented seal that makes it very easy to open simultaneously provides tamper evidence functionality. The packaging is advantageous for contents such as edible products and high-density chemicals e.g., paint and putty.

emballator
LAGAN PLAST